# Major specifications for AccurioLabel 230 (Printer main body only)

| major specifica  | tions for Accurron | abei 230 (Printer main body only)   |                  |  |                            |
|--|--------------------|---|------------------|--|----------------------------|
| Print method Colour support Print resolution/gradation |                    | Dry-toner electrophotography Full Colour (CMYK) 3600 dpi (equivalent) x 1200 dpi/8 bit  |                  |  |                            |
|  |                    |   | Print image size |  | 90 × 115 to 320 × 1,195 mm |
|  |                    |   | Paper width      |  | 165 to 330 mm              |
| Paper thickness range                                  |                    | 81 to 256 gsm (80 to 250 μm)  |                  |  |                            |
| Print media  |                    | Non-adhesive paper (81 to 176 gsm)<br>Adhesive paper (136 to 256 gsm)<br>Adhesive coated paper G/M (136 to 256 gsm)<br>Adhesive synthetic paper (136 to 176 gsm)<br>Adhesive PP film (136 to 176 gsm)<br>Adhesive PET film (136 to 216 gsm) |                  |  |                            |
| Print speed  | Speed range        | Max.: 23.4 m/min (76 fpm)<br>High: 18.9 m/min (62 fpm)<br>Middle: 13.5 m/min (44 fpm)<br>Low: 9.45 m/min (31 fpm)   |                  |  |                            |
|  | By media weight    | 81 to 176 gsm: max. 23.4 m/min<br>177 to 256 gsm: max. 18.9 m/min   |                  |  |                            |
| Compatible file formats                                |                    | PS, PDF (APPE supported), 8-bit TIFF  |                  |  |                            |
| VDP file formats                                       |                    | PPML, PDF-VT  |                  |  |                            |
| Power supply   |                    | Printer: 1-phase 220 V, 25 A, 50/60 Hz<br>Digital platform: 3-phase 380 V, 20 A, 50/60 Hz   |                  |  |                            |
| Air supply   |                    | >8 bar (or equipped with an air compressor of the same specification)   |                  |  |                            |

# Specifications and features of delivered products are subject to change without notice.


# Specifications of embedded controller


| Туре                                   | Embedded (AIO)   |
|--|--|
|  | Equivalent to IC-605B equipped with UK-104   |
| CPU                                    | Intel Core i5 4570S 2.9 GHz (CPU in printer)   |
| Memory                                 | System memory 16 GB  |
| HDD                                    | 1 TB × 3+500 GB × 1  |
| Network                                | 10/100/1000 Base-T   |
| System                                 | Linux  |
| Power supply                           | Powered by host  |
| Output speed                           | Max. 23.4 m/min  |
| Resolution                             | 1200×1200 dpi, 600×600 dpi   |
| Paper size                             | Min. 90 × 115 to max. 320 × 1195 mm (printer specification)  |
| PDL Language                           | PostScript 3 (CPSI 3020), PDF version 1.7, TIFF version 6<br>Compliant, PPML version 2.2, PCL5c equivalent, PCL XL (PCL6<br>version 3) equivalent, APPE version 4.6 <sup>-1</sup> , PDF/VT version 2 <sup>-1</sup> |
| Protocol                               | TCP/IP, NetBEUI, IPP, WSD, SMB, Bonjour  |
| Compatible OS                          | Windows 7, 8.1, 10<br>Windows Server 2008/R2, 2012/R2, 2016, 2019 (including<br>64-bit versions)<br>Mac OS X 10.9, X 10.10, X 10.11, X 10.12, X 10.13, 0.14  |
| Main fonts                             | Adobe 136 fonts, PCL 80 fonts  |
| Driver                                 | PS Plugin driver   |
| Compatible Konica Minolta applications | PS Web Connection, PS Net Care Device Manager, Color<br>Centro, AccurioPro Hot Folder  |
| *1 LIV 210 option required             |  |


<sup>\*1</sup> UK-218 option required

### **External Dimensions & Footprint**

| Outside dimensions (length × width × height) | $4,700 \times 2,862 \times 1,540$ mm (If the optional Flexo Station is included: $5,540 \times 3,270 \times 1,540$ mm)   |  |
|--|--|--|
| Footprint (length × width × height)          | $4,785 \times 3,270 \times 1,540$ mm (If the optional Flexo Station is included: $5,625 \times 3,270 \times 1,540$ mm)   |  |
| Weight                                       | Total weight: about 2,420 kg (If the optional Flexo Station is included: 2,980 kg) Unwinding unit: approx. 380 kg Front adjustment unit: approx. 330 kg (Optional Flexo Station: approx. 560 kg) Platform unit: approx. 350 kg Printer: approx. 297 kg Rear adjustment unit: approx. 510 kg Rewinding unit: approx. 550 kg |  |

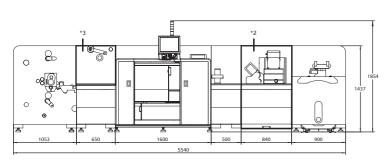



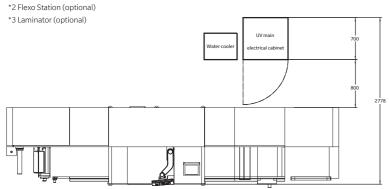

The paper types and paper weights mentioned in this document are printed under specific conditions, and some untested papers may not be suitable for printing production.

Product appearance, configuration and/or specifications are subject to change without notice.

# KONICA MINOLTA, INC.

2-7-2 Marunouchi Chiyoda-ku, Tokyo, Japan https://www.konicaminolta.com/



AccurioLabel






# DIGITAL LABEL PRINTING

# Gain the Digital Advantage


Print runs are getting shorter across the market compared to the long-run, high-volume orders that were once the norm. Being able to offer competitively priced, low-volume print runs and cope with short turnaround times is essential to meeting market demands. With digital printing, you can fulfil low-volume orders

efficiently and maintain profit margins for your business. Simplify workflow and add value to your services with benefits such as variable data printing (VDP), or numbering, to stand out in a market where needs are increasingly diverse.

# Preparation, including colour adjustment and ink cleaning, etc. is required 1 Print plates must be changed between each job 2 Significant waste from trial and test runs (especially in roll-feed systems) 3 Expert operator required

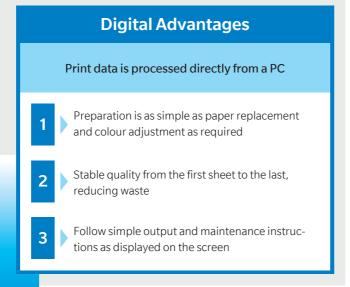

The AccurioLabel 230 digital label printer offers outstanding productivity, image quality and operability as well as economic advantages which make it ideal for those aiming to expand into the label market alongside existing analogue services.







Small text

Even small-point characters

are reproduced clearly, ensuring readability.

Accurio Label 230

Visible roughness is suppressed to reproduce richly textured human skin

AccurioLabel 230

AccurioLabel 230

**Barcode printing** 

Even small barcodes can be printed clearly without

blurring. VDP barcodes can also be printed.

# **ENHANCED PRODUCTIVITY & FLEXIBILITY**

Digital print businesses are demanding shorter turnaround times and expanded applications. The AccurioLabel 230 has the solution with exceptional productivity and broad capabilities including the ability to print onto pre-printed transparent or coloured media.

### **ENHANCED PRODUCTIVITY**

# Fast print speed of up to 23.4 m/min.

The highest possible speed to print onto most adhesive papers and films is 23.4 m/min. Compared to previous models, the AccurioLabel 230 has improved speed, a shorter delivery cycle and broader applications to expand business scope.

# IMPROVED EFFICIENCY

# **Short warm-up time**


Warm-up time between jobs is minimised by keeping the fixing unit operational during the transition between jobs. This not only improves overall productivity by reducing changeover time, but also reduces paper waste.

# EXTENDED RUN LENGTH

# Continuous printing up to 1,000 meters

Print large, continuous production jobs without the losses incurred by turnover times and switching paper. When printing long jobs where toner coverage is low, the AccurioLabel 230 will automatically add colour belts to both sides of the paper to supply the necessary amount of toner and keep the developer fresh. Colour belts are not necessary when toner coverage is 3.5% or higher.





# **EASY TO USE**

# Operator panel supports mouse operation

The large, 15-inch display is easy to view and operate. The angle of the panel can be freely adjusted to suit individual users and the intuitive GUI and guidance messages ensure ease of operation during setup. A USB mouse can be connected to further improve operability.

# WIDER RANGE OF APPLICATIONS

# Strong media compatibility without pre-treatment

 $\mathsf{HD}^\mathsf{E}$  digital toner and Konica Minolta's low-temperature fixation technology make the AccurioLabel 230 compatible with a wide range of media above and beyond ordinary paper or matte options. Print onto all the gloss, adhesive and film medias that are essential for label production. Users can select the ideal medium for their designs and print labels without the need for pre-processing.

# Label substrates

### Glossy or matte fine art paper

Ideal for locally produced food or beverages, event supplies, souveniers etc.

# YUPO®, PET, PP, etc.


Perfect for cosmetics, pharmaceuticals, industrial products, heverages etc.

AccurioLabel 230

# PRINT ON TRANSPARENT OR COLOURED MEDIA

# Overprinting capability with accurate alignment

The system can be equipped with an optional overprint kit to enhance compatibility. The module's new eye mark sensor enables precise alignment, which in turn allows the device to carry out digital four-colour printing on pre-coated media.

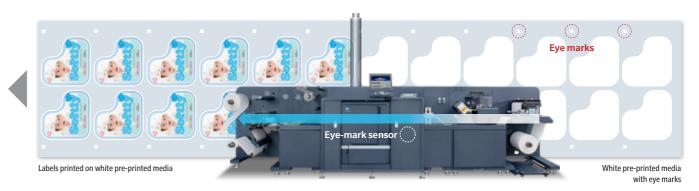

# LABELS UNLIMITED BY SAFE USE

# **Food Grade Toner**

The toner used by the AccurioLabel 230 meets FDA standards for safety in applications with indirect contact to food, such as packaging labels.

\* FDA standards are strict safety standards established by the FDA (US Food and Drug Administration) fo potential products that come into contact with food, medicines, and cosmetics.

# OTHER APPLICATIONS

# Banner printing capability

From store decorations to floor POP advertisements, the AccurioLabel 230 can print an extensive range of large formats including long posters and signboards. Combine medias to create promotional materials combining labels with other items to boost business expansion.



6 AccurioLabel 230

# **EXCELLENT & CONSISTENT QUALITY**

As experts in realising outstanding quality for the high-end print market, Konica Minolta has developed a range of unique technologies. Colour fluctuation is minimised, ensuring stable and beautiful finishes from start to finish. High-quality images add value to printed materials, and to the services you can offer.

HIGH-RESOLUTION. MULTI-LEVEL DATA PROCESSING

# **High resolution** 3,600 (equivalent) x 1,200 dpi x 8 bits

Combined with the reproductive capability of HD<sup>E</sup> digital toner, small characters and fine lines can be printed clearly, and colour images can be beautifully output with rich colour gradations.

# CUTTING-EDGE IMAGE PROCESSING TECHNOLOGY

S.E.A.D. V

Konica Minolta's cutting-edge image processing technology S.E.A.D. V is based on a new generation of image processing ASICs (dedicated chips) and uses a fully automated colour adjustment function to achieve optimum print quality.






# HIGH QUALITY, LOW ENERGY CONSUMPTION Simitri HD<sup>E</sup> polymerised toner

A 3D hybrid structure composed of functional polymers thatg are highly compatible with various types of media and enables reproduction of ideal natural textures. What's more, the toner requires only a small amount of heat to fuse, significantly reducing power consumption.

# ■ 3-dimensional hybrid particles










# ■ Blue Wool Test: The results according to ISO 105 B2 (lightfastness test)

Remarks: The evaluation criteria classify colourants into 8 levels (1-8), and the higher the value, the higher the lightfastness.


 $8^{+}$  test results indicate that the lightfastness of Cyan and Black toner is ranked as 8 or higher

# CHOOSE A SCREENING METHOD BASED ON THE PURPOSE OF USE **High-quality screening**




Rough screen Dot 130L











AccurioLabel 230

Dot 270L

Line 180L

photo printing and moiré suppression.

Stochastic screen FM-1

# SUPERB REPRODUCTION QUALITY OF SMALL CHARACTERS AND FINE LINES

**Dot 190L** 

# Line thinning and edge enhancement technologies

The device features precise contour processing that is able to effectively improve flaws such as blurred characters and streaks, and allows even coloured or contoured characters to be reproduced at a high-quality. Small characters on food or ingredient labels, or barcodes are made clearly visible.

The AccurioLabel 230 comes with twelve halftone screens, including six dot screens, three line screens, and three stochastic (FM) screens. Users can

choose a halftone screen according to their needs, such as proof output,






# STABILISED DEVELOPER

# **Auto-refining development system**

A new carrier is supplied together with the toner to refresh the carrier in the developer, stabilising the developer and ensuring high-quality image output throughout the life cycle of the system. The developer's longer lifespan also minimises equipment downtime.

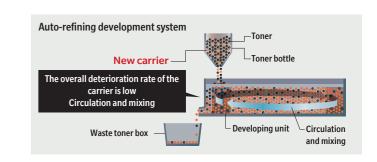


AccurioLabel 230 AccurioLabel 230

# **OUTSTANDING OPERABILITY**


The ease of maintaining the AccurioLabel 230 is superior not only to flexography printers, but also to liquid-development and inkjet printers. Time-consuming tasks, such as colour adjustments, can be completed with ease on the digital printing system. Operators can perform operations by simply following on-screen instructions with little time needed for training.

# **COLOUR MANAGEMENT UTILITY**

# **Color Centro**




Implement calibration settings and check accuracy via the workstation screen.



# SIMPLIFIED PRINTING OPERATION

# AccurioPro Hot Folder

The AccurioPro Hot Folder allows you to directly print PDF of TIFF files without starting an application. You can also pre-set job settings streamline the process of making print settings.




Equipped with colour management software as standard, the AccurioLabel 230 supports colour correction, colour characteristic profile creation, and related editing and settings, making it an idea fit for the digital printing systems currently in use.



Spot colour editing


Set specific colours designated by the user. Select from a colour chart and register changes directly.



# LATEST ADOBE PDF PRINT ENGINE

# APPE 4.6

Capable of directly printing PDF files without using a print driver, enabling faithful reproduction of transparency. Optional UK-218 (APPE kit) required.

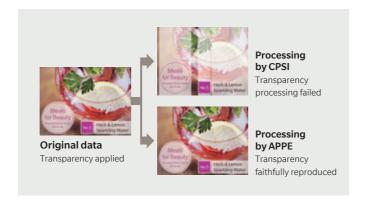


# AN INDISPENSABLE TOOL FOR AUTOMATED LABEL PRINTING

# **AccurioPro Label Impose**

The AccurioPro Label Impose software tool provides the perfect solution for preparing label print jobs. Simple and intuitive, the software allows users to automatically impose and prepare label jobs for print while also enabling the creation of PDF data for the necessary cutting on die cutting equipment. AccurioPro Label Impose works seamlessly with the AccurioLabel 230.



AccurioLabel 230

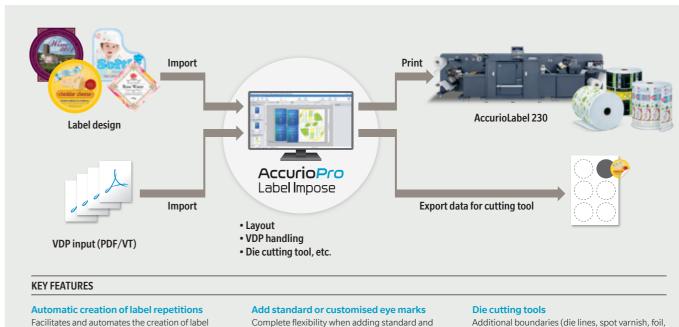

Facilitates and automates the creation of label repetitions on the label web.

# Variable Data Printing (VDP)

Easily incorporate VDP into the automatic creation of duplicate labels.

### Adjustable spacing

Operators have the freedom to adjust the spacing between columns and rows individually and as required.

Complete flexibility when adding standard and customised eye marks in any desired position for offline finishing.

### Arranging artwork

Users can choose between automatic and manual arrangement of artwork for the label layout.

### Gang-up printing

A single sheet can be populated with just one or a variety of selected artwork motifs.

Additional boundaries (die lines, spot varnish, foil, etc.) can be detected and exported to PDF to be used as die cutting tools or to add additional embellishments to labels.

# ■ Recommended requirements

| Operating system  | Windows 7/8.1/10 Pro (64-bit)    |
|-------------------|----------------------------------|
| Memory            | 2 GB RAM                         |
| Disk space        | 1 GB                             |
| CPU               | Intel i5 dual core or equivalent |
| Screen resolution | 1,280 x 720 pixels               |

10 AccurioLabel 230 AccurioLabel 230